




LI DE HENG ELECTRONICS MP35005S thru MP3510S

35.0 A Single-Phase Silicon Bridge Rectifiers

Rectifier Reverse Voltage 50 to 1000V



Features

- This series is UL listed under the Recognized Component Index, file number E142814
- Single In-Line terminals array suitable for P.C. board mounting
- Surge overload ratings to 400 amperes
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Integrally molded heat sinks provide low thermal resistance for maximum heat dissipation
- High temperature soldering guaranteed 265 °C / 10 seconds at 5 lbs (2.3kg) tension


Mechanical Data

Case: Molded plastic with heat sink integrally mounted in the bridge encapsulation

Terminals: Plated wire leads solderable per MIL-STD-202, Method 208

Mounting Position: Any

Weight: 0.6 ounce, 17 grams (approx)

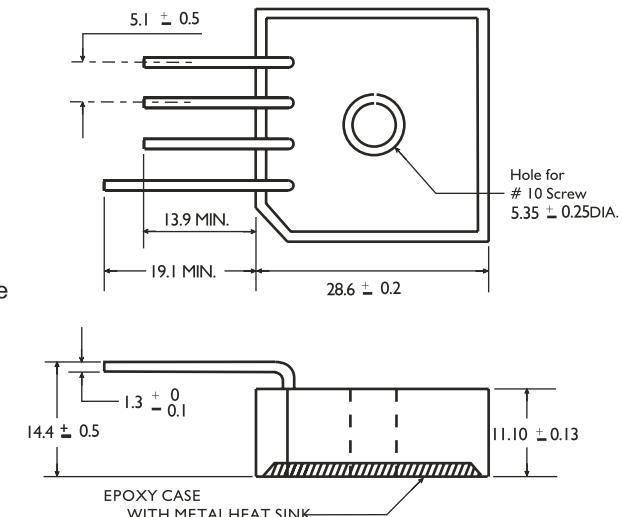

Dimensions in millimeters (1mm=0.0394")

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	MP 35005S	MP 3501S	MP 3502S	MP 3504S	MP 3506S	MP 3508S	MP 3510S	Unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=55°C	IF(AV)				35				A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				400				A
Rating for fusing (t<8.3ms)	I ² t				664				A ² sec
Typical thermal resistance per element(1)	ReJA				2.0				°C / W
Operating junction and storage temperature range	TJ, TSTG				-55 to + 150				°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	MP 35005S	MP 3501S	MP 3502S	MP 3504S	MP 3506S	MP 3508S	MP 3510S	Unit
Maximum instantaneous forward voltage drop per leg at 17.5A	VF				1.0				V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C	IR				10 500				μA

Notes: (1)Thermal resistance from Junction to Ambemton P.C.board mounting.

Rating and Characteristic Curves ($T_A = 25^\circ\text{C}$ Unless otherwise noted)
MP35005S thru MP3510S

Fig. 1 Derating Curve for Output Rectified Current

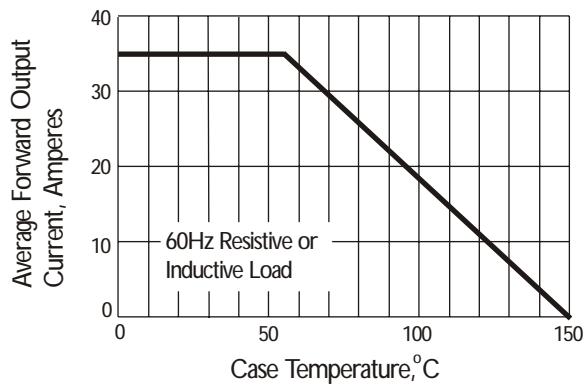


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

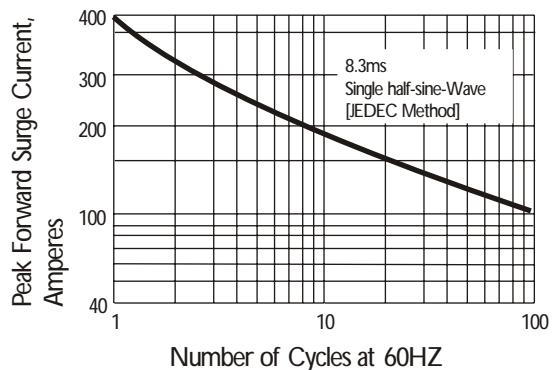


Fig. 3 Typical Instantaneous Forward Characteristics

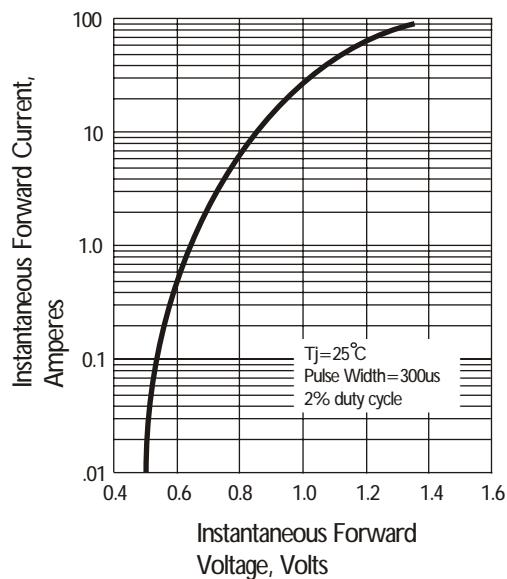


Fig. 4 Typical Reverse Characteristics at T_j = 25°C

