



LI DE HENG ELECTRONICS

BA157 thru BA159

1.0A Fast Recovery Silicon Rectifier
Rectifier Reverse Voltage 50 to 600V

Features

- Diffused junction
- Fast switching for high efficiency
- High current capability and low Forward Voltage Drop
- Surge overload rating to 30A peak
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

Mechanical Data


Case: Molded plastic

Terminals: Solder plated solderable per MIL-STD-202,
Method 208

Polarity: Cathode band

Mounting Position: Any

Weight: 0.3grams (approx)

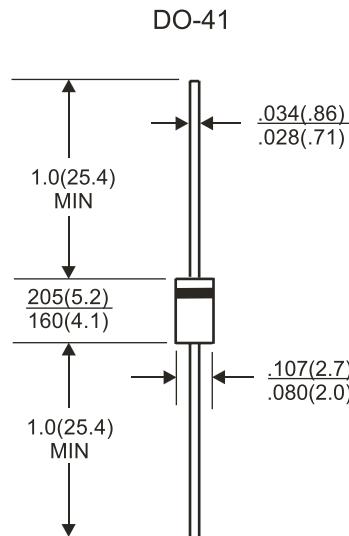

All dimensions inches and (millimeters)

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	BA157	BA158	BA159	unit
Maximum repetitive peak reverse voltage	VRRM	400	600	1000	V
Maximum RMS bridge input voltage	VRMS	280	420	700	V
Maximum DC blocking voltage	VDC	400	600	1000	V
Maximum average forward rectified output current at TA=75°C	IF(AV)		1.0		A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM		30.0		A
Maximum reverse recovery time TJ=25°C	Trr	150	250	500	nS
Typical thermal resistance per element	ReJA		50		°C/W
Typical junction capacitance per element	Cj		15		pF
Operating junction and storage temperature range	TJ, TSTG		-65 to + 150		°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20%.

Parameter	Symbol	BA157	BA158	BA159	Unit
Maximum instantaneous forward voltage drop per leg at 1.0A	VF		1.3		V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C	IR		5.0 50.0		μA

Rating and Characteristic Curves ($T_A = 25^\circ\text{C}$ Unless otherwise noted)
BA157 thru BA159

Fig. 1 Reverse Recovery Time and Test Circuit Diagram

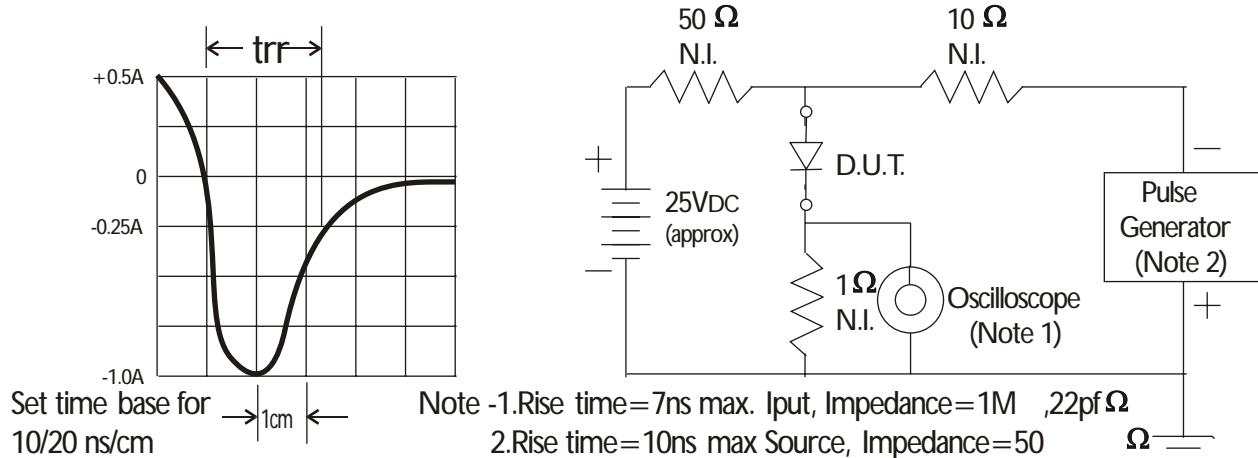


Fig. 2 Derating Curve for Output Rectified Current

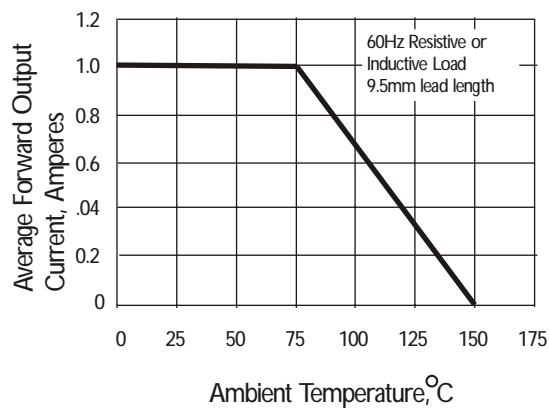


Fig. 4 Typical Instantaneous Forward Characteristics

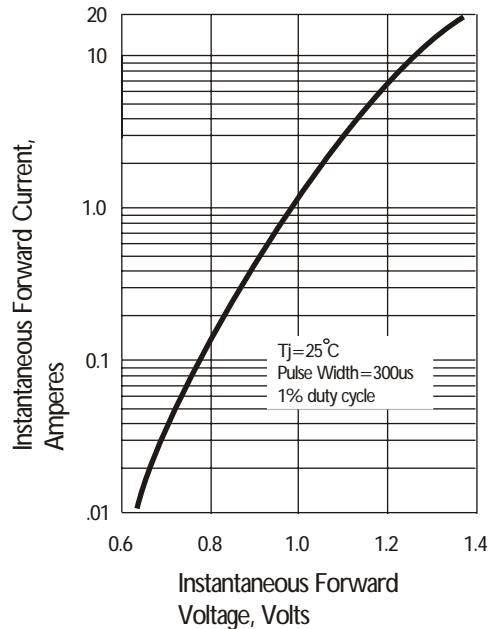


Fig. 3 Peak Forward Surge Current

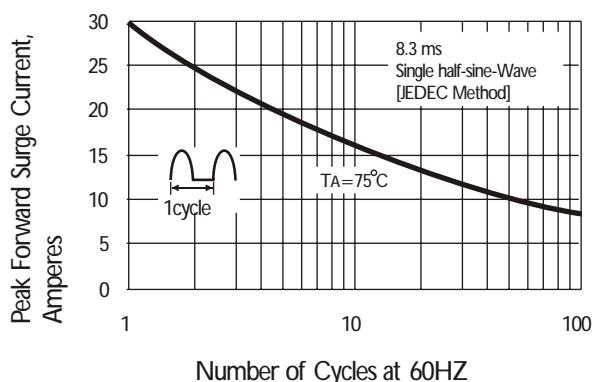


Fig. 5 Typical Junction Capacitance

